

An aerial photograph of a city skyline across a wide river. In the foreground, a large, ornate metal truss bridge spans the water. The city buildings are visible in the background under a clear blue sky. The river reflects the sky and the bridge. The text is overlaid on a semi-transparent white box in the center of the image.

V-Bank Series  
HVAC Mini Pleat  
Filters  
Product Brochure

# 2V Elite

## V-Bank Mini Pleat Filters



### 2V ELITE

The 2V Elite V-Bank filters are constructed with moisture-resistant, microfine fiberglass media and can be ordered as MERV 11, MERV 13, MERV 14, MERV 15 and MERV 16. Available with a single header, our 2V Elite V-Bank filters utilize aerodynamic vertical supports, constructed from ABS plastic, to reduce air entrance turbulence. The top and bottom sides of the frame are made of high impact polystyrene (HIPS) to enhance rigidity. The 2V Elite V-Bank's frame is equipped with a built-in pre filter spacer and removal handles. The handles incorporated in the frame allow for ease of handling and filter removal, while the spacer reduces configuration loss when mounting a pre filter directly to the V-Bank filter. The frame is also fully incinerable.

- Available in nominal 12" depth
- MERV 11, 13, 14, 15 & 16
- Moisture-resistant fiberglass media
- High impact polystyrene (HIPS) cell sides
- UL Classified
- Max temp: 175°F

### CONSTRUCTION



*Frame construction*



# 4V Elite

## V-Bank Mini Pleat Filters




### 4V ELITE

The 4V Elite V-Bank filters are constructed with moisture-resistant, microfine fiberglass media and can be ordered as MERV 11, MERV 13, MERV 14, MERV 15 and MERV 16. Available with a single header, our 4V Elite V-Bank filters utilize aerodynamic vertical supports, constructed from ABS plastic, to reduce air entrance turbulence. The top and bottom sides of the frame are made of high impact polystyrene (HIPS) to enhance rigidity. The 4V Elite V-Bank's frame is equipped with a built-in pre filter spacer and removal handles. The handles incorporated in the frame allow for ease of handling and filter removal, while the spacer reduces configuration loss when mounting a pre filter directly to the V-Bank filter. The frame is also fully incinerable.

- Available in nominal 12" depth
- MERV 11, 13, 14, 15 & 16
- Moisture-resistant fiberglass media
- High impact polystyrene (HIPS) cell sides
- UL Classified
- Max temp: 175°F

### CONSTRUCTION

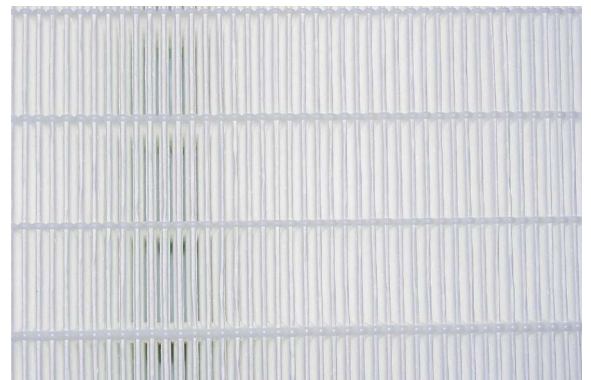

*Mini pleat media*

# 2V Ultra V-Bank Mini Pleat Filters




## 2V ULTRA

The 2V Ultra V-Bank filters are constructed with synthetic media and can be ordered as MERV 11, MERV 13, MERV 14, MERV 15 and MERV 16. Available with a single header, our 2V Ultra V-Bank filters utilize aerodynamic vertical supports, constructed from ABS plastic, to reduce air entrance turbulence. The top and bottom sides of the frame are made of high impact polystyrene (HIPS) to enhance rigidity. The 2V Ultra V-Bank's frame is equipped with a built-in pre filter spacer and removal handles. The handles incorporated in the frame allow for ease of handling and filter removal, while the spacer reduces configuration loss when mounting a pre filter directly to the V-Bank filter. The frame is also fully incinerable.

- Available in nominal 12" depth
- MERV 11, 13, 14, 15 & 16
- Synthetic media
- High impact polystyrene (HIPS) cell sides
- UL Classified
- Max temp: 175°F

## CONSTRUCTION

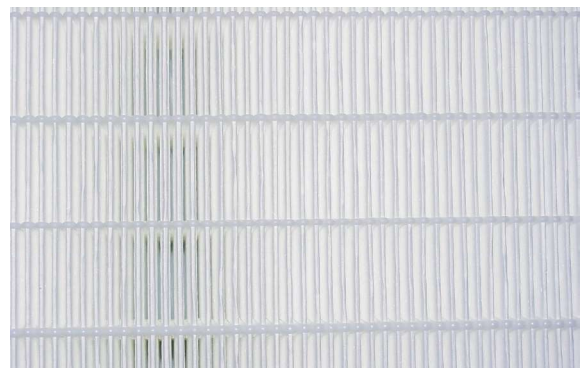

*Mini pleat media*

# 4V Ultra V-Bank Mini Pleat Filters



## 4V ULTRA

The 4V Ultra V-Bank filters are constructed with synthetic media and can be ordered as MERV 11, MERV 13, MERV 14, MERV 15 and MERV 16. Available with a single header, our 4V Ultra V-Bank filters utilize aerodynamic vertical supports, constructed from ABS plastic, to reduce air entrance turbulence. The top and bottom sides of the frame are made of high impact polystyrene (HIPS) to enhance rigidity. The 4V Ultra V-Bank's frame is equipped with a built-in pre filter spacer and removal handles. The handles incorporated in the frame allow for ease of handling and filter removal, while the spacer reduces configuration loss when mounting a pre filter directly to the V-Bank filter. The frame is also fully incinerable.

- Available in nominal 12" depth
- MERV 11, 13, 14, 15 & 16
- Synthetic media
- High impact polystyrene (HIPS) cell sides
- UL Classified
- Max temp: 175°F

## CONSTRUCTION



*Built-in handles*

# Additional HVAC Products




## PROCELL HVAC BOX FILTERS

- Available in fiberglass (Elite) and synthetic (Ultra) media
- MERV 11 to MERV 14 efficiencies
- Plastic and metal frame options



## PROCELL PLUS HVAC BOX FILTERS

- ASHRAE, HT and MIF options available
- MERV 11 to MERV 15 efficiencies
- ASHRAE and MIF available in galvanized frame
- HT available in aluminized steel frame
- Aluminum media separators

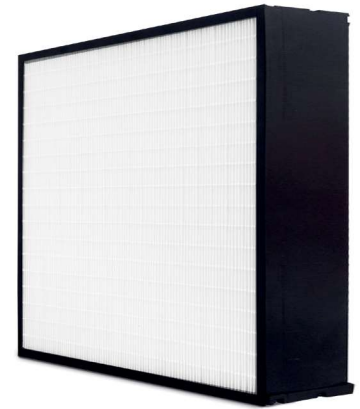

## THIN LINE HVAC MINI PLEAT FILTERS

- Available in 2", 4" and 6" depths
- Available in MERV 11, 13, 14, 15 and 16 efficiencies
- Available with beverage board or plastic frame
- Available in fiberglass and synthetic media
- UL 900 Classified

MANN+HUMMEL is committed to continual product development - all descriptions, specifications and performance data are subject to change without notice. MANN+HUMMEL products are manufactured to exacting criteria - there can be a ±5% variance in filter performance.

### LOCAL REPRESENTATIVE